

# ATEM Television Studio Pro 4K



**\$3,245**

ATEM Television Studio Pro 4K features 8 independent 12G-SDI inputs, for working in all popular HD and Ultra HD formats up to 2160p60. Each input features re-sync as well as a full low latency standards converter, which means the input is automatically adapted to the switchers format. You can even have 8 inputs, all running different video formats! The upgraded Fairlight audio mixer features dynamics, 6 band parametric EQ, dual mono channel split and stereo simulator with audio delay on the analog inputs. ATEM Television Studio Pro 4K also features the ATEM Advanced Chroma Key, Ultra HD multi-view and motion clips in the media pool.

## Connections

**Total Video Inputs**

8

**Total Outputs**

12

**Total Aux Outputs**

1

**SDI Rates**

1.5G, 3G, 6G, 12G.

**Total Audio Inputs**

2 x XLR. 1 x Microphone.

**Total Audio Outputs**

1 x Headphone.

**SDI Video Inputs**

8 x 10-bit HD/UHD switchable. 2 channel embedded audio.

**HDMI Video Inputs**

None

**Reference Inputs**

Tri-Sync or Black Burst.

**Video Input Re-Sync**

On all 8 inputs.

**Frame rate and format convertors**

On all 8 inputs.

**SDI Program Outputs**

9 x 10-bit HD/UHD switchable.

**SDI Audio Outputs**

2 Ch embedded into SDI output.

**Total Multi Views**


1

**SDI Multi View Outputs**

1

**HDMI Multi View Outputs**

1

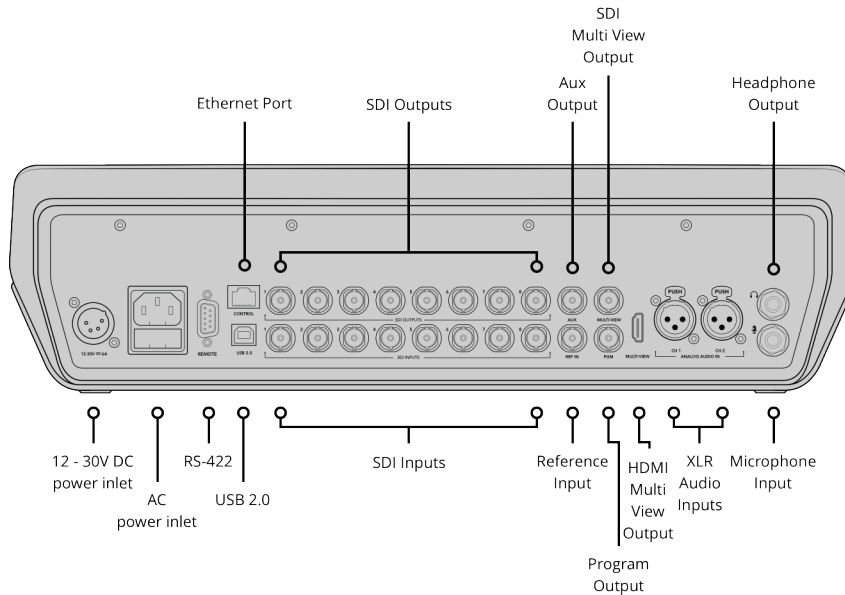

## Standards

### SD Video Standards

None

### HD Video Standards

720p50, 720p59.94  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p50, 1080p59.94  
 1080i50, 1080i59.94

### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
 2160p29.97, 2160p50, 2160p59.94

### SDI Compliance

292M and 424M, 2081, 2082.

### Video Sampling

4:2:2 10-bit

### Color Precision

4:2:2 10-bit

### Color Space

4:2:2 YUV

### Input Resolutions for Computers

720p50, 720p59.94  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60  
 1080i50, 1080i59.94, 2160p23.98,  
 2160p24, 2160p25, 2160p29.97,  
 2160p30, 2160p50,  
 2160p59.94, 2160p60.

### Colorspace Conversion

None

### Processing Delay

6 Lines.

### Audio Mixer

12 input x 2 channel mixer.  
 Selectable On/Off/Audio-Follow-Video per channel plus separate gain control per channel.  
 Level and Peak metering. Plus new Fairlight audio enhancements: Compressor, Gate, Limiter, 6 bands of parametric EQ. Delay line and Stereo Synthesizer on the XLR inputs only.  
 Master gain control. Headphone output level control with separate mix of Program, Talkback and Sidetone.

## Product Specifics

### Upstream Keys

1 with Chroma/Linear/Luma key.

### Downstream Keys

2

### Chroma Keys

1

### Linear/Luma Keys

3

### Talkback Support

Built in, uses aviation headset.

### Mix Minus Support

Yes, on 8 camera PGM outputs.

### Transition Keyer (Stinger/DVE)

Stinger and DVE.

### Total Number of Layers

5

### Pattern Generators

2

<b>Color Generators</b> 2	<b>Number of Windows</b> 1 x 10	<b>Tally Output</b> Embedded via SDI. Added via ethernet connection to Blackmagic Design GPI and Tally Interface product. (Not included)
<b>DVE with 3D Borders &amp; Drop Shadow</b> 1	<b>Routable Windows</b> 8 routable and 2 fixed for Program and Preview.	<b>Windows Source Labels</b> Yes.
<b>Interface</b> Minimum monitor resolution of 1366 x 768.	<b>Tally</b> Red for program and green for preview indication.	

---

## Multi View Monitoring

<b>Multi View Monitoring</b> 1 x 10 Views.	<b>Multi View Video Standard</b> HD/Ultra HD.	
---	--	--

---

## Media Player

<b>Media Players</b> 2, with non volatile flash memory.	<b>Media Pool Clip Capacity</b> 2 with fill and key. Shared pool.	<b>Media Player Clip Length in Ultra HD</b> 90 frames.
<b>Media Pool Still Image Capacity</b> 20 with fill and key.	<b>Media Pool Clip File Format</b> TGA Sequence.	<b>Media Pool Audio File Format</b> WAV, MP3 and AIFF.
<b>Media Pool Still Image Format</b> PNG, TGA, BMP, GIF, JPEG and TIFF.	<b>Media Player Clip Length in 720 HD</b> 1440 frames.	
<b>Channels</b> Fill and key for each Media Player.	<b>Media Player Clip Length in 1080 HD</b> 360 frames.	

---

## Control

<b>Control Panel</b> Built in with camera control. Software panel included. Supports optional broadcast panel.	<b>Control Panel Compatibility</b> Compatible with ATEM 1 M/E Advanced Panel, ATEM 2 M/E Advanced Panel and ATEM 4 M/E Advanced Panel. Includes ATEM Software Control Panel.	<b>Control Panel Included</b> ATEM Software Control Panel included free for Mac 10.12 Sierra or Mac 10.13 High Sierra or later and Windows 8.1 64-bit or Windows 10 64-bit.
---	---	--

---

## Software

<b>Software Updates</b> Using USB connection directly connected to Mac or Windows computers. Includes ATEM Setup Utility.	<b>Configuration</b> Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Setup Utility connected via USB to chassis.	
--	--	--

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

---

## Power Requirements

### Power Supply

1 x Internal 100 - 240V AC. 4 pin  
12V DC.

### Power Usage

70W

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature:

5°C to 40°C

### Storage Temperature:

-20° to 60°C (-4° to 140°F)

### Relative Humidity:

0% to 90% non-condensing

---

## What's Included

ATEM Television Studio Pro 4K

Welcome wallet with QR code for  
software download

---

## Warranty

12 Months Limited  
Manufacturer's Warranty.

---

---

**Repair policy**

Warranty details can be found in the ATEM Switchers Operation Manual in the support page at [www.blackmagicdesign.com](http://www.blackmagicdesign.com).

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller