

ATEM Camera Control Panel



The ATEM Camera Control Panel provides independent controls for up to 4 URSA Mini, URSA Broadcast, Blackmagic Studio and Micro Studio cameras from a single control panel. You get iris control, shutter speed, white balance, master gain, pedestal, RGB controls for white and black, and more.

\$3,079


Connections

Ethernet

2 x 10/100/1000 BaseT with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

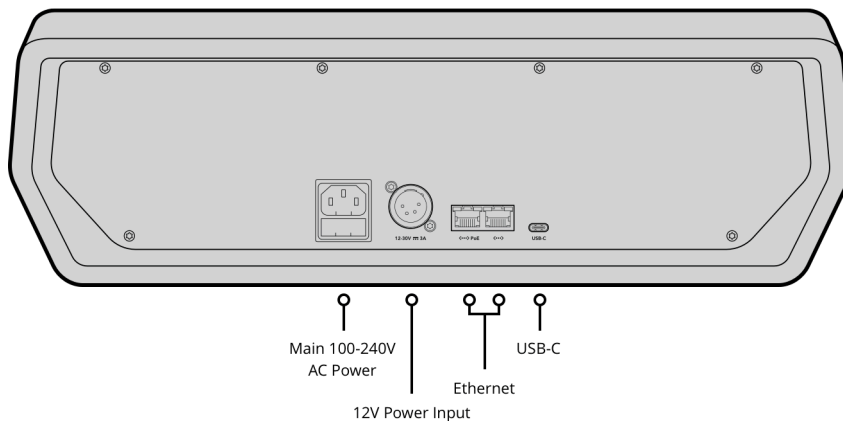

Product Specifics

LCD Menu Displays

4

3 Axis Joystick

4

Panel Active

Protects settings.

Camera Number Display

Green off air, red on air.

Preview Button

4

Setup

White and black balance setup.

Iris Control

Auto Iris On, Coarse control.

Software

Software Applications

ATEM Software Control Panel.

Operating Systems



Mac 10.14 Mojave,
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

Power Requirements

Input Voltage

1 x Internal 100 - 240V AC.

Redundant Power

Yes

DC Power

12-30V 3A.

Power Usage

30W

Physical Specifications



14.66 lb

Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

Up to 95%

What's Included

ATEM Camera Control Panel

Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller