

# OMN-ARNIS Network synchronizer single

## OMNEO



- ▶ Better scalability through the use of either a DHCP server and/or DNS server
- ▶ Allows PTP audio clock synchronization over multiple subnets
- ▶ Supports up to 450 devices in a single subnet optionally, in combination with the OMN-ARNIE
- ▶ Supports redundancy



The OMN-ARNIS enhances the scalability of the OMNEO system, acting as a high performance Dynamic Host Configuration Protocol (DHCP) server. The device supports up to 450 OMNEO devices in a single subnet standalone environment. It can also be used in routed networks in combination with the OMN-ARNIE to support subnets of up to 450 OMNEO devices.

**i Notice**

While the device supports up to 450 devices, you always need to consider the limitations of your specific system.

The connectors not described are used for computer peripherals (monitor, keyboard, mouse, etc.).

**Front and rear view**

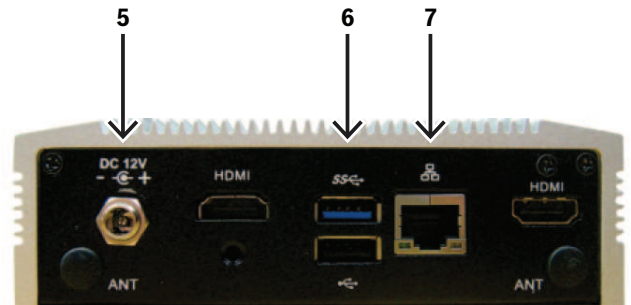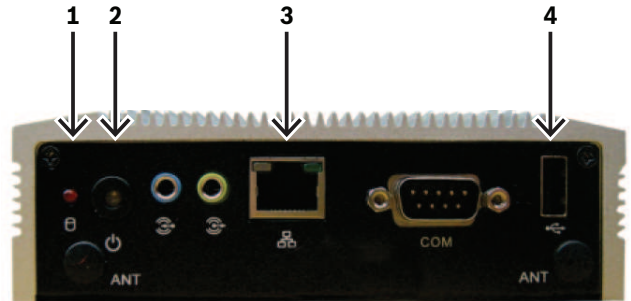

**Functions**

High performance DHCP (Dynamic Host Configuration Protocol) server which eliminates the need to use the IPv4LL protocol.  
 ARNI acts as a high performance DHCP server optimized for the use cases of the OMNEO systems during power up and 24/7 operations. As a DHCP server, ARNI supports one (1) subnet when there is no DHCP server available.  
 DNS-SD (Domain Name System – Service Directory) server which is used to discover all OMNEO equipment on a (routed) network without the need and load for Multicast DNS.  
 ARNI also extends the use of PTP (Precision Time Protocol) over multiple IP (Internet Protocol) subnets by acting as a boundary clock, synchronized to a grandmaster clock (OMN-ARNIE) using unicast PTP, and acts as the multicast PTP master for its own subnet.

1 Power and SSD LED indicators	2 Power button and Power LED indications
--------------------------------	--

3 / 7 LAN port	4 / 6 USB port
5 DC Input: 2-postion header power supply connector	

**Indicators**

Power supply and hard disk drive LED indicators.

**Interconnections**

- 2x LAN port
- 2x USB port
- 1x DC Input (2-postion header power supply connector)

**Regulatory information**

China	CCC
US	UL / FCC
JP	PSE
EMC	CD/FCC Class A, CCC, BSMI
Safety	UL, CCC, BSMI, CB

Region	Regulatory compliance/quality marks	
Europe	CE	EMEA

**Parts included**

Quantity	Component
1	ARNI
1	AC to DC converter
1	Mains cord EU version*
1	Recovery USB flash drive
1	ADVANTECH ARK-1123H software
1	Safety instructions

\*See the Ordering information for ordering details of the region-related version.

**Technical specifications**

**Mains power supply**

Input voltage (VAC)	100 VAC – 240 VAC
Power frequency	50 Hz; 60 Hz
Alternate current to direct current	12 V / 36 W

**Electrical**

DC power supply	12 VDC
Power consumption (W) (typical)	15 W
Power consumption (W) (maximum)	30 W
Transmission frequency (GHz)	2 GHz
L2 cache	2 MB
BIOS	AMI EFI
Memory type	DDR2 400/533 Mhz
Memory (RAM) (GB)	2 GB
Internal storage	SSD
Ethernet type	10/100/1000BASE-T
Number of USB ports	3
Processor type	Intel Celeron™ Processor J1900

**Mechanical**

Dimension (H x W x D) (mm)	43.10 mm x 133.80 mm x 94.20 mm
Dimension (H x W x D) (in)	1.7 in. x 5.27 in. x 3.71 in.
Weight (g)	450 g
Weight (lb)	1.30 lb
Color	Silver
Material	Aluminum

**Environmental**

Operating temperature (°C)	-20 °C – 60 °C
Operating temperature (°F)	-4 °F – 140 °F
Operating relative humidity, non-condensing (%)	0% – 95%
Storage temperature (°C)	-40 °C – 85 °C
Storage temperature (°F)	-40 °F – 185 °F
Transportation temperature (°C)	-40 °C – 85 °C
Transportation temperature (°F)	-40 °F – 185 °F

## Ordering information

### OMN-ARNIS Network synchronizer single

The ARNI (Audio Routed Network Interface) component of the OMNEO system enhances the scalability of the system.

Order number **OMN-ARNIS | F.01U.311.135**

## Accessories

### ARNI RM GEN-2 Rack mount shelf kit for ARNI

19" rack mount shelf for two OMN-ARNIX.

Order number **ARNI RM GEN-2 | F.01U.311.606**

### PWR CORD ARNI EU Power cord for ARNI, EU

EU mains power supply cord for Audio Routed Network Interface.

Order number **PWR CORD ARNI EU | F.01U.316.527**

### PWR CORD ARNI UK Power cord for ARNI, UK

UK mains power supply cord for Audio Routed Network Interface.

Order number **PWR CORD ARNI UK | F.01U.316.528**

## Services

### EWE-ARNIS-IW 12 mths wrty ext ARNI-S OMNEO IF

12 months warranty extension

Order number **EWE-ARNIS-IW | F.01U.365.528**

#### Represented by:

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Tel.: +49 (0)89 6290 0  
Fax: +49 (0)89 6290 1020  
[de.securitysystems@bosch.com](mailto:de.securitysystems@bosch.com)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**North America:**  
Bosch Security Systems, LLC  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
[onlinehelp@us.bosch.com](mailto:onlinehelp@us.bosch.com)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)