BESD
Since 1996

FOLDABLE LED POSTER



RoHS

EMC

UL


www.besd-led.com


Extrusion Aluminum Cabinet





Customized Size

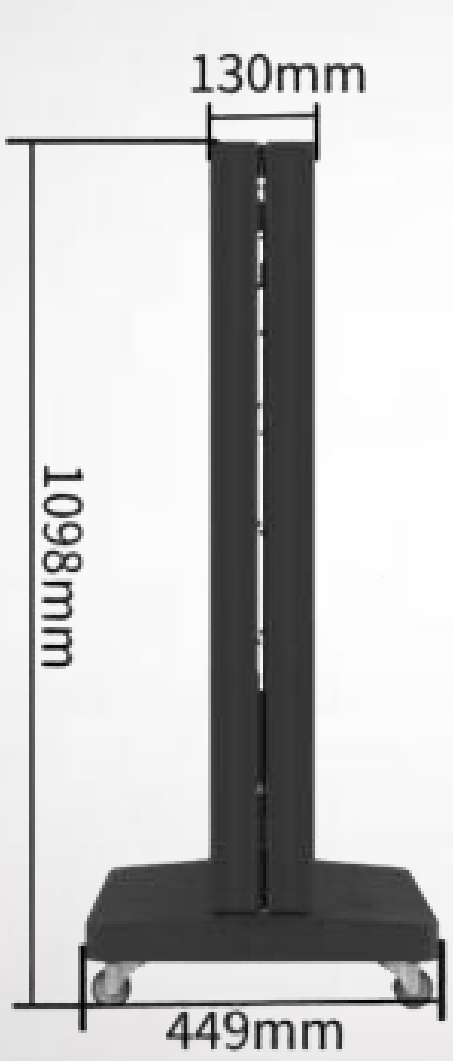

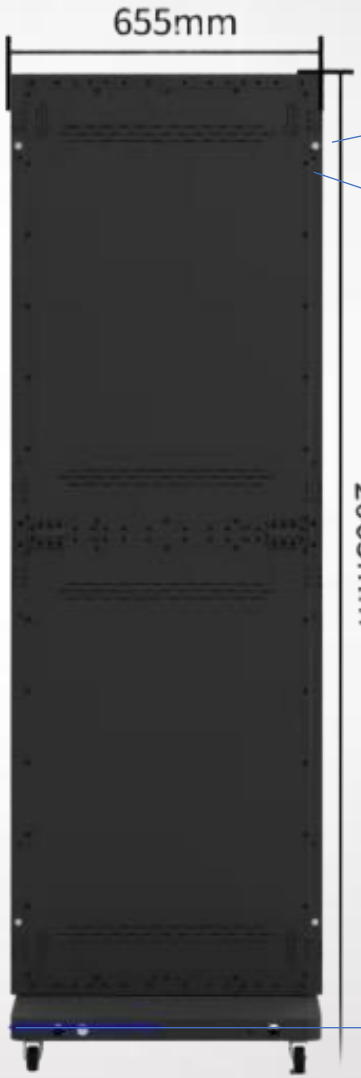

Frame with magnet

Connect lock


Controller system inside

Brake swivel caster

Real Photo





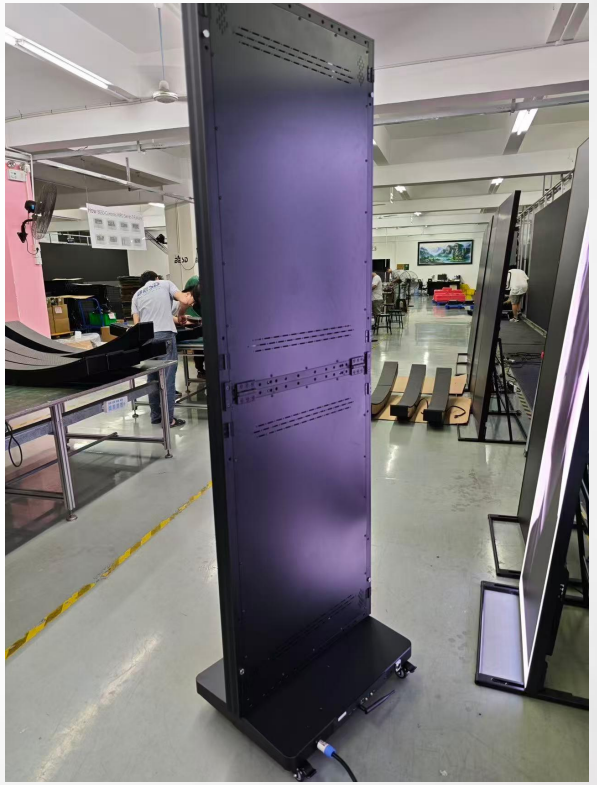



Technical Parameters



Model No.	PTI1.5	PTI1.8	PTI2.5
Application	Indoor (IP30)		
Display Size	640 x 1920mm / 960 x 1920mm		
Overall Size	650m(W) x 1930mm(H) x 100mm(D) / 970mm(W) x 1930mm(H) x 100mm(D)		
Pixel Pitch	1.538mm	1.86mm	2.5mm
Pixel Density(dots/m2)	519,168	288,906	160,000
LED Encapsulation	SMD1212	SMD1515	SMD2121 / SMD1921
Scan Rate	1/52 scan	1/48 scan	1/32 scan
Cabinet Size	650mm(W) x 1930mm(H) x 100mm(D) / 970mm(W) x 1930mm(H) x 100mm(D)		
Module Resolution	208 x 104	172 x 86	128 x 64
Screen Resolution	416 x 1248 / 624 x 1248	344 x 1032 / 516 x 1032	256 x 768 / 384 x 768
Brightness (cd/m2)	600 - 650	600 - 650	700 - 800
Max./Ave. Power Consumption (W/m2)	500 / 180		
Weight	32kg / 45kg		
Service	Rear Service		
Horizontal / Vertical Viewing Angle (°)	160 / 110	160 / 110	160 / 110
Refresh Rate (Hz)	≥ 3840Hz	≥ 3840Hz	≥ 3841Hz
Power Supply	AC120 /240V (50Hz) (optional)	AC120 /240V (50Hz) (optional)	AC120 /240V (51Hz) (optional)
Control System	Novastar T Series	Novastar T Series	Novastar T Series